CLIMAFLEX® LS

CLIMAFLEX® LS jest elastycznym materiałem wykonanym z pianki polietylenowej o zamkniętokomórkowej strukturze, przeznaczonym do izolacji rur kanalizacyjnych.

- Tłumi odgłosy przepływu wody
- Skutecznie i trwale wygłusza dźwięki przenoszone w układzie rur
- Chroni przed skroplinami i korozją

Charakterystyka produktu

- Odporność na ogień: Euro klasa E (EN 13501-1)
- Zakres temperatur: do +100°C (EN 14707)
- Izolacja akustyczna: 17 dB(A)

Obszary zastosowań

- Systemy grzewcze i hydrauliczne, kanalizacyjne

NMC Polska
ul. Pyskowicka 15 PL - 41807 Zabrze
Phone : +48 32 373 24 40 · Fax : +48 32 373 24 43
E-Mail: biuro@nmc.pl
www.nmc-insulation.com

CLIMAFLEX® LS

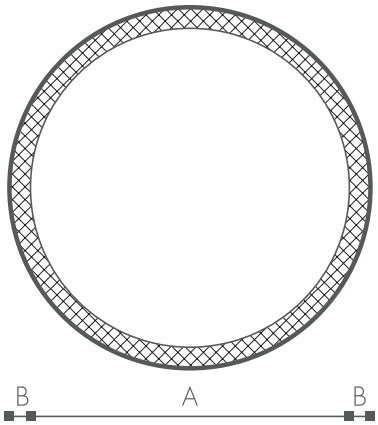

Asortyment

Typ	A mm	B mm	Długość m	Opakowań jednostkowych
50 x 5	60 - 63	5	20 m	140 m
70 x 5	85 - 88	5	20 m	100 m
100 x 5	120 - 124	5	20 m	80 m
125 x 5	135 - 139	5	20 m	60 m

NMC reserves the right to update the product line or its technical features to the state-of-the-art technology anytime and without previous announcement. All given information is to the best of our knowledge. If you have any questions concerning technical details please contact the NMC information service. Any partial reproduction or reprint shall require our explicit approval.

05/2019 responsible publisher: NMC sa, Gert-Noël-Strasse, B-4731 Eynatten www.nmc-insulation.com