



INSUL-TUBE® H PLUS COIL

INSUL-TUBE® H PLUS COIL is a flexible insulating material made of closed-cell foam based on rubber available as a coil.

- Professional thermal insulation for energy savings of up to 80%
- Improvement of the economic and ecological efficiency of the entire unit
- Sound absorbing insulation for acoustic comfort
- Minimal cutting scrap
- Minimal edge fittings

Product features

- Thermal conductivity (EN ISO 8497):
0,035 W/mK to 0°C
0,037 W/mK to 40°C
0,044 W/mK to 70°C
- Fire performance (EN 13501-1): B_s3d0
- Temperature range: up to 110°C (EN 14707)
- See website for Declaration of Performance:
www.nmc-insulation.com


Application area

- Heating and plumbing



NMC sa
Gert-Noël-Strasse · B - 4731 Eynatten
Phone: +32 87 85 85 00 · Fax: +32 87 85 83 55
E-Mail: info@nmc.eu
www.nmc-insulation.com



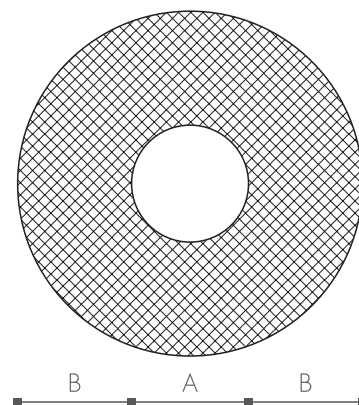

Product range

Copper CU		Steel FE			Synthetics MSV & PEX		A	B	Length m	Packaging unit
NW	Outer Ø	NW	Outer Ø		Outer Ø	Type				
DN	mm	DN	mm	inch	mm	(mm)	mm	mm		
10	15	8	13,5	1/4	-	15 x 10 (11)	15	11	33m	33m
15	18	10	17,2	3/8	16	18 x 10 (11)	18	11	28m	28m
20	22	15	21,3	1/2	20	22 x 10 (11)	22	11	23m	23m
25	28	20	26,9	3/4	25	28 x 10 (11)	28	11	18m	18m