



ISOTUBE® 035

ISOTUBE® 035 is a PU foam insulation material protected by a special PVC sheet with a superior appearance.

- Professional thermal insulation for energy savings of up to 80%
- Improvement of the economic and ecological efficiency of the entire unit
- High-quality appearance
- We offer appropriate elbow joints for every diameter
- Protects the foam against any damage
- Easy to install

Product features

- Thermal conductivity (EN ISO 8497):
0,032 W/mK at 10°C
0,036 W/mK at 40°C
0,040 W/mK at 70°C
- Fire performance: Euroclass E (EN 13501-1)
- Temperature range: 0°C to +110°C (EN 14707)
- Working temperature: $\geq +5^{\circ}\text{C}$


Application area

- Heating and plumbing



NMC sa
Gert-Noël-Strasse · B - 4731 Eynatten
Phone: +32 87 85 85 00 · Fax: +32 87 85 83 55
E-Mail: info@nmc.eu
www.nmc-insulation.com

nmc

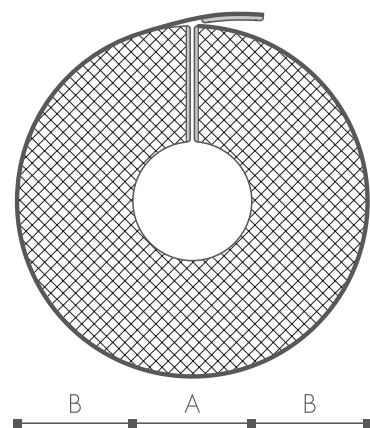

Product range

| Copper CU | | Steel FE | | | Synthetics MSV & PEX | | Type | A mm | B mm | Length m | Packaging unit |
|-----------|---------------|----------|---------------|-------|-------------------------|------|----------------|---------|---------|-------------|-------------------|
| NW DN | Outer Ø mm | NW DN | Outer Ø mm | inch | Outer Ø mm | EnEV | | | | | |
| 10 | 15 | 8 | 13,5 | 1/4 | - | 100% | 15 x 20 | 15 - 18 | 20 | 1 m | 63m |
| 15 | 18 | 10 | 17,2 | 3/8 | 16 | 100% | 18 x 20 | 18 - 21 | 20 | 1 m | 63m |
| 20 | 22 | 15 | 21,3 | 1/2 | 20 | 100% | 22 x 20 | 22 - 25 | 20 | 1 m | 54m |
| 25 | 28 | 20 | 26,9 | 3/4 | 25 | 100% | 28 x 30 | 30 - 33 | 31 | 1 m | 28m |
| 32 | 35 | 25 | 33,7 | 1 | 32 | 100% | 35 x 30 | 35 - 38 | 30 | 1 m | 24m |
| 40 | 42 | 32 | 42,4 | 1 1/4 | 40 | 100% | 42 x 40 | 42 - 45 | 40 | 1 m | 15m |
| - | - | 40 | 48,3 | 1 1/2 | - | 100% | 48 x 40 | 48 - 51 | 41 | 1 m | 12m |
| - | - | 50 | 60,3 | 2 | - | 100% | 60 x 50 | 62 - 65 | 49 | 1 m | 7m |