



ISOTUBE® 035

ISOTUBE® 035 is a PU foam insulation material protected by a special PVC sheet with a superior appearance.

- Professional thermal insulation for energy savings of up to 80%
- Improvement of the economic and ecological efficiency of the entire unit
- High-quality appearance
- We offer appropriate elbow joints for every diameter
- Protects the foam against any damage
- Easy to install

Product features

- Thermal conductivity (EN ISO 8497):
0,032 W/mK at 10°C
0,036 W/mK at 40°C
0,040 W/mK at 70°C
- Fire performance: Euroclass E (EN 13501-1)
- Temperature range: 0°C to +110°C (EN 14707)
- Working temperature: $\geq +5^{\circ}\text{C}$

Application area

- Heating and plumbing



NMC (uk) Ltd.


Tafarnaubach Industrial Estate · UK · NP22 3AA Tredgard, South Wales

Phone: +44 1495 713266 · Fax: +44 1495 713277

Email: enquiries@nmc-uk.com

www.nmc-insulation.com

nmc

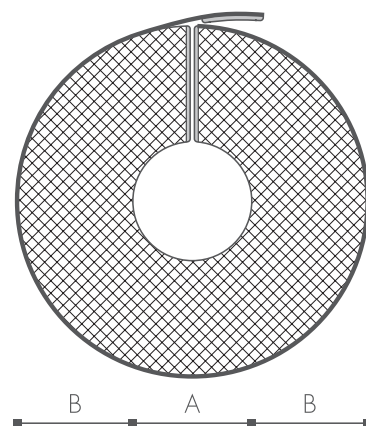

Product range

Copper CU		Steel FE			Synthetics MSV & PEX		Type	A mm	B mm	Length m	Packaging unit
NW DN	Outer Ø mm	NW DN	Outer Ø mm	Outer Ø inch	Outer Ø mm	EnEV					
10	15	8	13,5	1/4	-	100%	15 x 20	15 - 18	20	1 m	63m
15	18	10	17,2	3/8	16	100%	18 x 20	18 - 21	20	1 m	63m
20	22	15	21,3	1/2	20	100%	22 x 20	22 - 25	20	1 m	54m
25	28	20	26,9	3/4	25	100%	28 x 30	30 - 33	31	1 m	28m
32	35	25	33,7	1	32	100%	35 x 30	35 - 38	30	1 m	24m
40	42	32	42,4	1 1/4	40	100%	42 x 40	42 - 45	40	1 m	15m
-	-	40	48,3	1 1/2	-	100%	48 x 40	48 - 51	41	1 m	12m
-	-	50	60,3	2	-	100%	60 x 50	62 - 65	49	1 m	7m