



## CLiMATUBE® basic

---

### Low-cost alternative for cold water pipes

#### Product properties

- PE pipe insulation
- Scope of application: cold water pipes
- Insulating properties: thermal conductivity of 0.049 W/mK at 40°C mean temperature
- Protection against corrosion
- Fire class: E (normal flammability)
- Usable for pipe temperatures from 0°C to +100°C



---


#### **NMC (uk) Ltd.**

Tafarnaubach Industrial Estate · UK-NP22 3AA Tredegar, South Wales

Phone: +44 1495 713266 · Fax: +44 1495 713277

Email: [enquiries@nmc-uk.com](mailto:enquiries@nmc-uk.com)

[www.nmc-insulation.com](http://www.nmc-insulation.com)

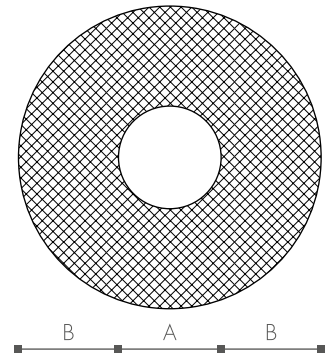

## Product range

| Type    | A<br>mm  | B<br>mm | Length | Packaging unit |
|---------|----------|---------|--------|----------------|
| 15 - 09 | 15 +1/+4 | 9 ± 1,5 | 1 m    | 150m           |
| 18 - 09 | 18 +1/+4 | 9 ± 1,5 | 1 m    | 125m           |
| 22 - 09 | 22 +1/+4 | 9 ± 1,5 | 1 m    | 110m           |
| 28 - 09 | 28 +1/+4 | 9 ± 1,5 | 1 m    | 85m            |
| 35 - 09 | 35 +1/+4 | 9 ± 1,5 | 1 m    | 61m            |
| 42 - 09 | 42 +2/+6 | 9 ± 1,5 | 1 m    | 44m            |
| 15 - 13 | 15 +1/+4 | 13 ± 2  | 1 m    | 98m            |
| 18 - 13 | 18 +1/+4 | 13 ± 2  | 1 m    | 93m            |
| 22 - 13 | 22 +1/+4 | 13 ± 2  | 1 m    | 75m            |
| 28 - 13 | 28 +1/+4 | 13 ± 2  | 1 m    | 62m            |
| 35 - 13 | 35 +1/+4 | 13 ± 2  | 1 m    | 50m            |
| 42 - 13 | 42 +2/+6 | 13 ± 2  | 1 m    | 39m            |