



CLiMATUBE® easy
nmc nature@foam®

Sustainable insulation concept

Product properties

- PE pipe insulation made of renewable and recycled resources
- Scope of application: heating and hot water pipes
- Excellent insulating properties: thermal conductivity of 0.04 W/mK at 40°C mean temperature
- Heating energy losses reduced by up to 74%
- Fire class: E (normal flammability)
- Simple processing by zipping
- Prevents stress cracking – corrosion
- Usable for pipe temperatures from 0°C to +100°C




NMC (uk) Ltd.

Tafarnaubach Industrial Estate · UK-NP22 3AA Tredegar, South Wales

Phone: +44 1495 713266 · Fax: +44 1495 713277

Email: enquiries@nmc-uk.com

www.nmc-insulation.com

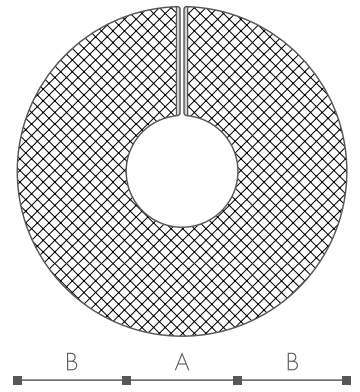

Product range

Type	A mm	B mm	Length	Quantity
15 - 13	15 +1/+4	13 ± 2	1 m	100m
18 - 13	18 +1/+4	13 ± 2	1 m	87m
22 - 13	22 +1/+4	13 ± 2	1 m	80m
28 - 13	28 +1/+4	13 ± 2	1 m	62m
35 - 13	35 +1/+4	13 ± 2	1 m	52m
42 - 13	42 +2/+6	13 ± 2	1 m	38m
15 - 25	15 +1/+4	25 ± 2,5	1 m	24m
18 - 25	18 +1/+4	25 ± 2,5	1 m	20m
22 - 25	22 +1/+4	25 ± 2,5	1 m	20m
28 - 25	28 +1/+4	25 ± 2,5	1 m	16m