



CLiMATUBE® silence

Structure-borne sound insulation in the sanitary areas


Product features

- PE protective hose
- Protection against corrosion and damage
- Scope of application: heating and sanitary facilities, ventilation ducts
- Sound insulation for plastic and metal pipes
- Easy covering due to inner sliding film
- Fire class: E (normal flammability)
- Usable for temperatures from 0 °C to +95 °C
- Sound pressure level: up to 20 dB(A)



NMC sa
Gert-Noël-Strasse · B-4731 Eynatten
Phone: +32 87 85 85 00 · Fax: +32 87 85 83 55
E-Mail: info@nmc.eu
www.nmc-insulation.com

nmc

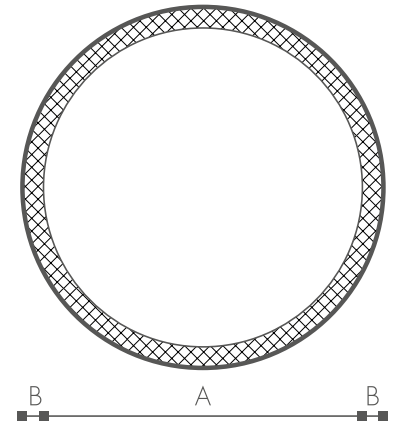

Product range

Type	A mm	B mm	Length	Quantity
50 - 4	70 ± 3	4	2,5m	2,5m
70 - 4	92 ± 3	4	2,5m	2,5m
100 - 4	125 ± 4	4	2,5m	2,5m