



CLiMATUBE® wool

Non-combustible pipe insulation made of mineral wool

Product properties

- Scope of application: heat conduction and service water systems, pipe, air conditioning and ventilation lines
- Excellent insulating properties: thermal conductivity of 0.037 W/mK (at nominal thickness ≤ 40 mm) at 40°C mean temperature
- Heat energy losses reduced by up to 81 %
- Fire class: A2L s1 d0 (non-combustible)
- Usable for pipe temperatures from 0°C to +250°C
- Melting temperature >1000°C

NMC (uk) Ltd.


Tafarnaubach Industrial Estate · UK-NP22 3AA Tredegar, South Wales

Phone: +44 1495 713266 · Fax: +44 1495 713277

Email: enquiries@nmc-uk.com

www.nmc-insulation.com



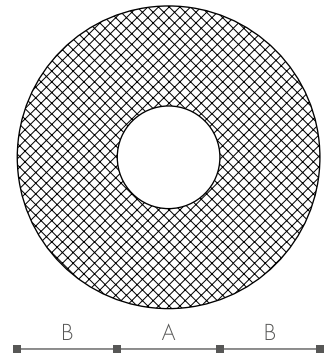

Product range

Type	A mm	B mm	Length	Packaging unit
15 - 20	15 + 4	23	1 m	42 m
18 - 20	18 + 4	22	1 m	42 m
22 - 20	22 + 4	22	1 m	36 m
28 - 20	28 + 4	22	1 m	30 m
35 - 20	35 + 4	20	1 m	25 m
42 - 20	42 + 4	21	1 m	20 m
48 - 20	48 + 4	22	1 m	20 m
60 - 20	60 + 4	20	1 m	15 m