



CLiMATUBE® zip

nmcnature@foam®

Heat cost cutting solution with zip

Product properties

- PE pipe insulation made of renewable and recycled resources
- Scope of application: heating and hot water pipes
- Excellent insulating properties: thermal conductivity of 0.04 W/mK at 40°C mean temperature
- Heating energy losses reduced by up to 74%
- Fire class: E (normal flammability)
- Simple processing by zipping
- Prevents stress cracking – corrosion
- Usable for pipe temperatures from 0°C to +100°C




NMC (uk) Ltd.

Tafarnaubach Industrial Estate · UK-NP22 3AA Tredegar, South Wales

Phone: +44 1495 713266 · Fax: +44 1495 713277

Email: enquiries@nmc-uk.com

www.nmc-insulation.com

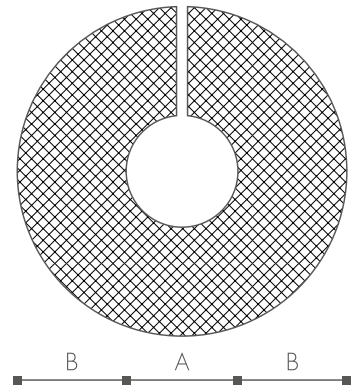

Product range

Type	A mm	B mm	Length	Quantity
15 - 15	15 +1/+4	15 ± 2	1 m	82 m
18 - 15	18 +1/+4	15 ± 2	1 m	76 m
22 - 15	22 +1/+4	15 ± 2	1 m	68 m
28 - 15	28 +1/+4	15 ± 2	1 m	51 m
35 - 15	35 +1/+4	15 ± 2	1 m	40 m
42 - 15	42 +2/+6	15 ± 2	1 m	32 m
48 - 15	48 +2/+6	15 ± 2	1 m	15 m
60 - 15	60 +2/+6	15 ± 2	1 m	12 m