

Our future can only be shaped successfully if we act responsibly in the present!

nmc naturefoam®


REFERENCE IN CLIMATE PROTECTION

With NMC Naturefoam®, the mix of renewable and recycled raw materials, we are improving the already very good climate and energy balance of our insulation products and are sending a signal against global warming.

DOUBLE IS BETTER

By using NMC Naturefoam® to make our CLIMATUBE® zip and CLIMATUBE® easy PE pipe insulation, we reduce CO₂ emissions drastically throughout the entire manufacturing process, from start to the factory gate.

By insulating your pipe system with our products, you make an important contribution to environmental protection by saving fuel. In this way, you too can reduce CO₂ emissions, save money and at the same do your bit in the fight against global warming!

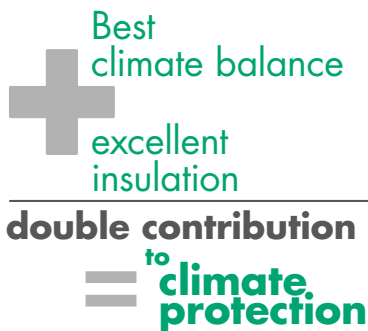

www.nmc-insulation.com

NMC sa
Gert-Noël-Str. · B-4731 Eynatten
☎ +32 87 85 85 00 · 📠 +32 87 85 85 11
info@nmc.eu



3043179 · 01/2020 · © NMC sa, 2020 · Resp. Publisher: NMC sa – Gert-Noël-Str. – B-4731 Eynatten



CLIMATUBE® easy

Sustainable insulation concept made of
nmc naturefoam®





CLIMATUBE® easy

SUSTAINABLE INSULATION CONCEPT

Time-saving pipe insulation solution with self-adhesive closure system.

- PE pipe insulation made of renewable and recycled resources
- Scope of application: heating and hot water pipes
- Excellent insulating properties: thermal conductivity of 0.04 W/mK at 40°C mean temperature
- Heating energy losses reduced by up to 74%
- Fire class: E (normal flammability)
- Simple processing by zipping
- Prevents stress cracking – corrosion
- Usable for pipe temperatures from 0°C to +100°C

Insulation thickness	Pipe Ø	Unit
13 mm	15 mm	1 m
13 mm	18 mm	1 m
13 mm	22 mm	1 m
13 mm	28 mm	1 m
13 mm	35 mm	1 m
13 mm	42 mm	1 m

Insulation thickness	Pipe Ø	Unit
25 mm	15 mm	1 m
25 mm	18 mm	1 m
25 mm	22 mm	1 m
25 mm	28 mm	1 m

Accessories

- 1 Self-adhesive PE elbows (for CLIMATUBE® easy 13 mm + 25 mm)
- 2 Self-adhesive PE T-pieces (for CLIMATUBE® easy 13 mm)
- 3 PVC adhesive tape (30 mm x 33 m) for taping the joints
- 4 PE wrapping tape (50 mm x 10 m) for insulating difficult-to-reach areas

