

# CLIMAFLEX® PROTECTIVE TUBE

---

CLIMAFLEX® PROTECTIVE TUBE is a sound damping tube made of closed-cell foam based on polyethylene with a robust outer skin.

- Inner gliding foil for easy pipe covering
- Protection against damage
- Sound damping for plastic and metal pipes
- Corrosion protection for metal pipes

## Product features

- Fire performance: Euroclass E (EN 13501-1)
- Temperature range: up to +95°C (EN 14707)
- Noise insulation: up to 20 dB(A)

## Application area

- Cold water pipes
- Cast iron and plastic waste water pipes
- Ventilation pipes



---


### **NMC (uk) Ltd.**

Tafarnaubach Industrial Estate · UK - NP22 3AA Tredegar, South Wales

Phone: +44 1495 713266 · Fax: +44 1495 713277

Email: [enquiries@nmc-uk.com](mailto:enquiries@nmc-uk.com)

[www.nmc-insulation.com](http://www.nmc-insulation.com)

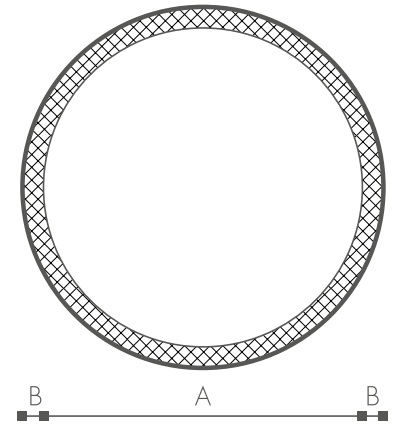

## Product range

For cold water pipes

Copper CU		Steel FE			Synthetics MSV & PEX	Type	A mm	B mm	Length m	Packaging unit
NW DN	Outer Ø mm	NW DN	Outer Ø mm	inch	Outer Ø mm					
10	15	8	13,5	1/4	-	<b>15 x 4</b>	20 ±2	4	10m	280m
15	18	10	17,2	3/8	16	<b>18 x 4</b>	25 ±2	4	10m	240m
20	22	15	21,3	1/2	20	<b>22 x 4</b>	27 ±2	4	10m	240m
25	28	20	26,9	3/4	25	<b>28 x 4</b>	33 ±2	4	10m	210m
32	35	25	33,7	1	32	<b>35 x 4</b>	40 ±2	4	10m	160m
40	42	32	42,4	1 1/4	40	<b>42 x 4</b>	45 ±2	4	10m	120m

For cast iron and plastic waste water pipes and ventilation pipes

Type	A mm	B mm	Length m	Packaging unit
50 x 4	70 ±3	4	10m	110m
60 x 4	72 ±3	4	10m	80m
70 x 4	92 ±3	4	10m	80m
80 x 4	100 ±3	4	10m	70m
90 x 4	112 ±4	4	10m	60m
100 x 4	125 ±4	4	10m	50m
125 x 4	148 ±4	4	10m	40m
136 x 4	160 ±5	4	10m	40m
150 x 4	180 ±5	4	10m	30m
50 x 9	70 ±5	9	10m	40m
70 x 9	92 ±5	9	10m	20m
90 x 9	116 ±8	9	10m	20m
100 x 9	125 ±10	9	10m	20m
125 x 9	142 ±10	9	10m	20m