



CLiMATUBE® basic

Low-cost alternative
for cold water pipes


Product properties

- Polyethylene pipe insulation based on recycled raw materials
- Scope of application: cold water pipes
- Insulating properties: thermal conductivity of 0.049 W/mK at 40°C mean temperature
- Protection against corrosion
- Fire class: E (normal flammability)
- Usable for pipe temperatures from 0°C to +100°C



NMC sa
Gert-Noël-Strasse · B-4731 Eynatten
Phone: +32 87 85 85 00 · Fax: +32 87 85 83 55
E-Mail: info@nmc.eu
www.nmc-insulation.com

nmc

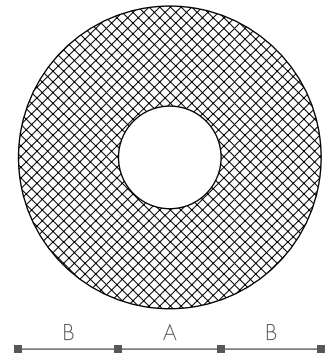

Product range

Type	A mm	B mm	Length	Packaging unit
15 - 09	15 +1/+4	9 ± 1,5	1 m	150m
18 - 09	18 +1/+4	9 ± 1,5	1 m	125m
22 - 09	22 +1/+4	9 ± 1,5	1 m	110m
28 - 09	28 +1/+4	9 ± 1,5	1 m	85m
35 - 09	35 +1/+4	9 ± 1,5	1 m	61m
42 - 09	42 +2/+6	9 ± 1,5	1 m	44m
15 - 13	15 +1/+4	13 ± 2	1 m	98m
18 - 13	18 +1/+4	13 ± 2	1 m	93m
22 - 13	22 +1/+4	13 ± 2	1 m	75m
28 - 13	28 +1/+4	13 ± 2	1 m	62m
35 - 13	35 +1/+4	13 ± 2	1 m	50m
42 - 13	42 +2/+6	13 ± 2	1 m	39m
15 - 20	15 +1/+4	20 ± 2,5	1 m	61m
18 - 20	18 +1/+4	20 ± 2,5	1 m	55m
22 - 20	22 +1/+4	20 ± 2,5	1 m	50m
28 - 20	28 +1/+4	20 ± 2,5	1 m	40m