

INSUL ROLL

INSUL ROLL is a flexible insulating material made of closed-cell foam based on rubber (rolled insulation).

- Due to the very good thermal insulation properties, the energy input for the operation of air-conditioning and refrigeration systems as well as sanitary and heating installations can be significantly reduced
- Improvement of the economic and ecological efficiency of the entire unit
- Prevention of condensation
- Sound absorbing insulation for acoustic comfort
- Cut as needed
- Minimal cutting scrap

Product features

- Thermal conductivity (EN ISO 12667):
0,033 W/mK at -50 °C
0,034 W/mK at -30 °C
0,036 W/mK at 0 °C
0,039 W/mK at 40 °C
0,041 W/mK at 70 °C
- Fire performance: Bs3d0 (EN 13501-1)
- Temperature range: -50 °C to 105 °C (EN 14707)
- Water vapour diffusion resistance (EN 13469):
≤ 25 mm: 10.000μ
≥ 32 mm: 7.000μ
- See website for Declaration of Performance: www.nmc-insulation.com

Application area

- Heating and plumbing
- Air conditioning
- Cooling systems
- Shipbuilding




NMC (uk) Ltd.

Tafarnaubach Industrial Estate · UK - NP22 3AA Tredegar, South Wales

Phone: +44 1495 713266 · Fax: +44 1495 713277

Email: enquiries@nmc-uk.com

www.nmc-insulation.com

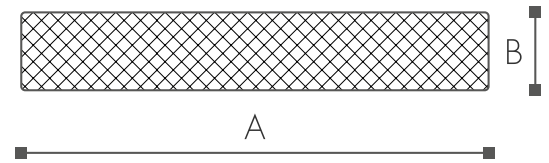

Product range

Type	A mm	B mm	Length m	Packaging unit
1000 x 6	1000	6	20m	20m ²
1000 x 9	1000	9	15m	15m ²
1000 x 13	1000	13	11m	11m ²
1000 x 16	1000	16	9m	9m ²
1000 x 19	1000	19	8m	8m ²
1000 x 25	1000	25	6m	6m ²
1000 x 32	1000	32	4m	4m ²
1000 x 40	1000	40	4m	4m ²
1000 x 50	1000	50	4m	4m ²