


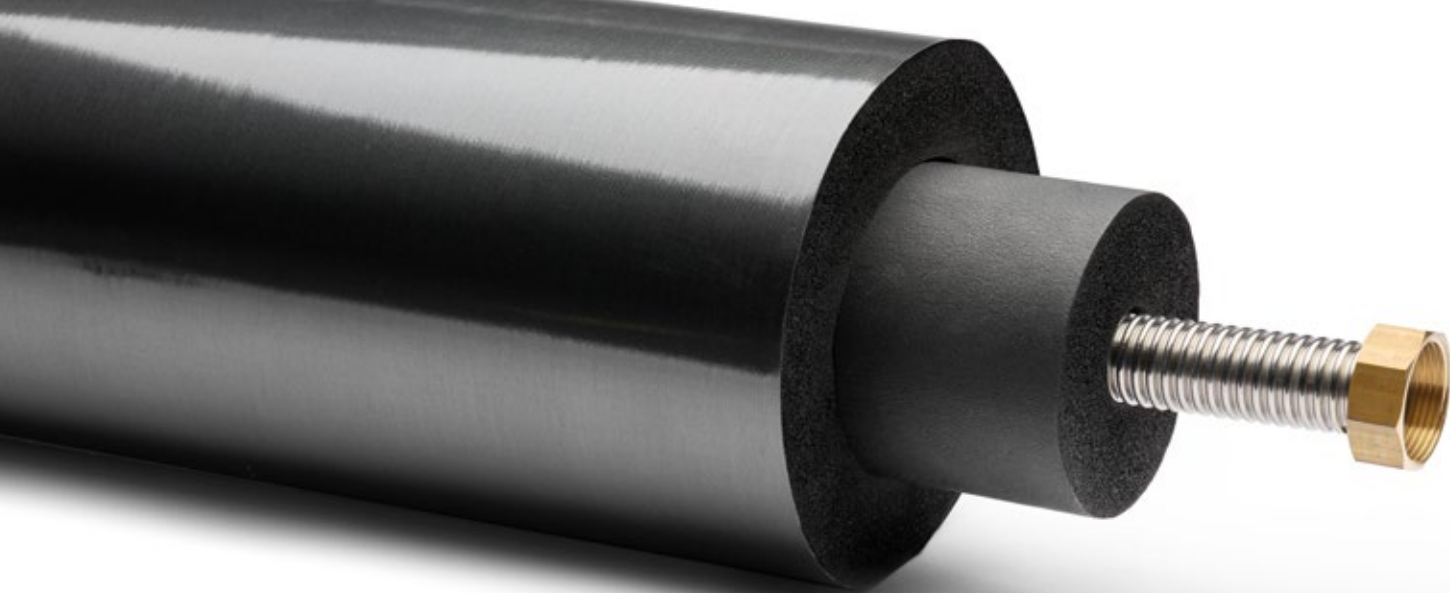

# AEROLINE®

## inox connect 200

### SHEATHING

|                  |                                                    |
|------------------|----------------------------------------------------|
| MATERIAL         | Additional EPDM insulation with surface protection |
| UV RESISTANCE    | Excellent                                          |
| OZONE RESISTANCE | Excellent                                          |

### STAINLESS STEEL CORRUGATED PIPE

|                                                    |                                 |
|----------------------------------------------------|---------------------------------|
| MATERIAL                                           | Material No. 1.4404 (AISI 316L) |
| MAXIMUM PERMISSIBLE<br>OPERATING PRESSURE AT 95 °C | DN 25: 6 bar<br>DN 32: 6,5 bar  |

### INSULATION MADE OF EPDM

|                      |                                                                                                                                                                                      |
|----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| MATERIAL             | Light, flexible, closed-cell, synthetic Rubber<br>No embrittlement of copper and stainless steel pipes<br>(DIN 1988 Part 200)<br>Dimensions and tolerances according to DIN EN 14304 |
| THERMAL CONDUCTIVITY | 0,036 W/mK at 0 °C<br>0,038 W/mK at 40 °C                                                                                                                                            |
| FIRE BEHAVIOUR       | Euro class E (DIN EN 13501-1)                                                                                                                                                        |



**NMC sa**  
Gert-Noël-Strasse · B-4731 Eynatten  
Tel.: +32 87 85 85 00 · Fax: +32 87 85 83 55  
E-Mail: [info@nmc.eu](mailto:info@nmc.eu)  
[www.nmc-insulation.com](http://www.nmc-insulation.com)



# PRODUCT RANGE

## AEROLINE® | inox connect 200

| Reference     | SAP     | Length (m) |
|---------------|---------|------------|
| <b>DN 25</b>  |         |            |
| 25 x 76/1 m   | 3053309 | 2          |
| 25 x 76/1,3 m | 3053310 | 2,6        |
| <b>DN 32</b>  |         |            |
| 32 x 76/1 m   | 3053311 | 2          |
| 32 x 76/1,3 m | 3053312 | 2,6        |

