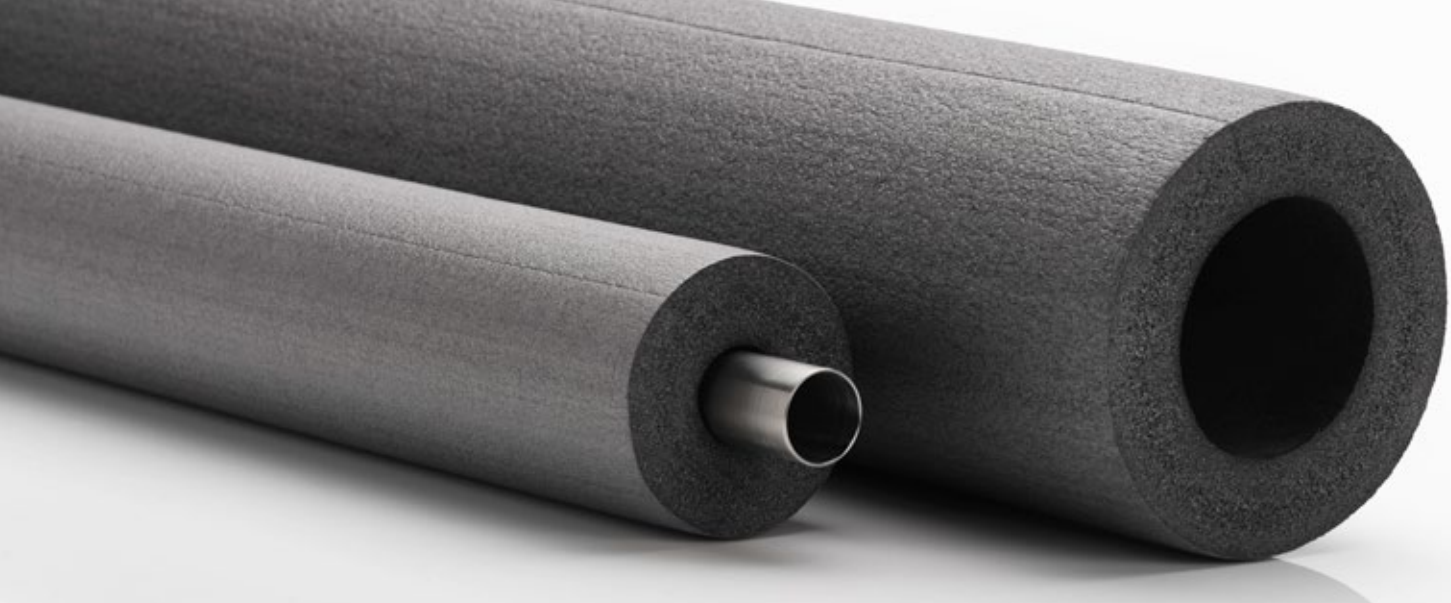


CLIMAFLEX® premium

MATERIAL	CLIMAFLEX® premium is a flexible insulation material made from closed-cell expanded polyethylene foam.
LENGTH	2 m
THERMAL CONDUCTIVITY (EN ISO 8497)	0,036 W/mK at 0 °C 0,040 W/mK at 40 °C 0,045 W/mK at 70 °C
TEMPERATURE RANGE (EN 14707)	0 °C to +100 °C
FIRE PERFORMANCE (EN 13501-1)	Thickness 6 - 25 mm: B_Ls1d0 Thickness 30 mm: D_Ls1d0
APPLICATION AREA	Heating and plumbing


ADVANTAGES	▪ Reduces heat loss thanks to its low thermal conductivity. ▪ Contributes to the energy-efficient operation of plumbing and heating systems by reducing heat loss. ▪ Can reduce flow and creaking noises, thereby improving acoustic comfort.

See website for Declaration of performance: www.nmc-insulation.com

NMC (UK) LTD.
Tafarnaubach Industrial Estate · UK-NP22 3AA Tredegar, South Wales
Phone: +44 1495 713266 · Fax: +44 1495 713277
Email: enquiries@nmc-uk.com
www.nmc-insulation.com

PRODUCT RANGE

CLIMAFLEX® | premium




	Copper CU		Steel FE			Synthetics MSV & PEX			
Type	NW DN	Outer Ø mm	NW DN	Outer Ø mm	Outer Ø inch	Outer Ø mm	A mm	B mm	Pkg unit m
15 x 6	10	15	8	13,5	1/4	-	15	6	440
18 x 6	15	18	10	17,2	3/8	16	18	6	400
22 x 6	20	22	15	21,3	1/2	20	22	6	320
28 x 6	25	28	20	26,9	3/4	25	28	6	250
35 x 6	32	35	25	33,7	1	32	35	6	180
15 x 9	10	15	8	13,5	1/4	-	15	9	380
18 x 9	15	18	10	17,2	3/8	16	18	9	330
20 x 9	-	-	-	-	-	-	20	9	260
22 x 9	20	22	15	21,3	1/2	20	22	9	250
25 x 9	20	25	-	25	-	25	25	9	200
28 x 9	25	28	20	26,9	3/4	25	28	9	190
32 x 9	-	-	-	-	-	32	32	9	160
35 x 9	32	35	25	33,7	1	32	35	9	150
42 x 9	40	42	32	42,4	1 1/4	40	42	9	110
48 x 9	-	-	40	48,3	1 1/2	-	48	9	90
54 x 9	50	54	-	54	-	50	54	9	70
60 x 9	-	-	50	60,3	2	63	60	9	66
63 x 9	-	64	-	63,5	-	63	63	9	66
76 x 9	65	76,1	65	76,1	2 1/2	76	79	9	48
89 x 9	80	88,9	80	88,9	3	90	89	9	40
15 x 13	10	15	8	13,5	1/4	-	15	13	256
18 x 13	15	18	10	17,2	3/8	16	18	13	220
22 x 13	20	22	15	21,3	1/2	20	22	13	180
28 x 13	25	28	20	26,9	3/4	25	28	13	140
35 x 13	32	35	25	33,7	1	32	35	13	120

NMC reserves the right to update the product line or its technical features to the state-of-the-art technology anytime and without previous announcement. All given information is to the best of our knowledge. If you have any questions concerning technical details please contact the NMC information service. Any partial reproduction or reprint shall require our explicit approval.
07/2026 responsible publisher: NMC sa · Gert - Noël - Strasse · B - 4731 Eynatten · www.nmc - insulation.com

PRODUCT RANGE

CLIMAFLEX® | premium




	Copper CU		Steel FE			Synthetics MSV & PEX			
Type	NW DN	Outer Ø mm	NW DN	Outer Ø mm	Outer Ø inch	Outer Ø mm	A mm	B mm	Pkg unit m
42 x 13	40	42	32	42,4	1 1/4	40	42	13	90
48 x 13	-	-	40	48,3	1 1/2	-	48	13	70
54 x 13	50	54	-	54	-	50	54	13	66
60 x 13	-	-	50	60,3	2	63	60	13	48
63 x 13	-	64	-	63,5	-	63	63	13	48
76 x 13	65	76,1	65	76,1	2 1/2	75	76	13	40
89 x 13	80	88,9	80	88,9	3	90	89	13	30
102 x 13	-	-	-	101,6	3 1/2	-	102	13	24
108 x 13	100	108	-	108	-	-	108	13	22
114 x 13	100	114	100	114,3	4	110	114	13	22
125 x 13	-	-	-	125	-	-	125	13	16
15 x 20	10	15	8	13,5	1/4	-	15	20	134
18 x 20	15	18	10	17,2	3/8	16	18	20	126
22 x 20	20	22	15	21,3	1/2	20	22	20	108
28 x 20	25	28	20	26,9	3/4	25	28	20	96
35 x 20	32	35	25	33,7	1	32	35	20	70
42 x 20	40	42	32	42,4	1 1/4	40	42	20	60
48 x 20	-	-	40	48,3	1 1/2	-	48	20	48
54 x 20	50	54	-	54	-	50	54	20	48
60 x 20	-	-	50	60,3	2	63	60	20	40
63 x 20	-	64	-	63,5	-	63	63	20	40
76 x 20	65	76,1	65	76,1	2 1/2	75	76	20	26
89 x 20	80	88,9	80	88,9	3	90	89	20	24
102 x 20	-	-	-	101,6	3 1/2	-	102	20	20
108 x 20	100	108	-	108	-	-	108	20	20

NMC reserves the right to update the product line or its technical features to the state-of-the-art technology anytime and without previous announcement. All given information is to the best of our knowledge. If you have any questions concerning technical details please contact the NMC information service. Any partial reproduction or reprint shall require our explicit approval.
07/2026 responsible publisher: NMC sa · Gert - Noël - Strasse · B - 4731 Eynatten · www.nmc - insulation.com

PRODUCT RANGE

CLIMAFLEX® | premium



	Copper CU		Steel FE			Synthetics MSV & PEX			
Type	NW DN	Outer Ø mm	NW DN	Outer Ø mm	Outer Ø inch	Outer Ø mm	A mm	B mm	Pkg unit m
114 x 20	100	114	100	114,3	4	110	114	20	14
125 x 20	-	-	-	125	-	-	125	20	12
15 x 25	10	15	8	13,5	1/4	-	15	25	90
18 x 25	15	18	10	17,2	3/8	16	18	25	90
22 x 25	20	22	15	21,3	1/2	20	22	25	70
28 x 25	25	28	20	26,9	3/4	25	28	25	66
35 x 25	32	35	25	33,7	1	32	35	25	56
42 x 25	40	42	32	42,4	1 1/4	40	42	25	48
48 x 25	-	-	40	48,3	1 1/2	-	48	25	40
60 x 25	-	-	50	60,3	2	63	60	25	30
76 x 25	65	76,1	65	76,1	2 1/2	75	76	25	24
89 x 25	80	88,9	80	88,9	3	90	89	25	16
114 x 25	100	114	100	114,3	4	110	114	25	12
22 x 30	20	22	15	21,3	1/2	20	22	30	60
28 x 30	25	28	20	26,9	3/4	25	28	30	54
35 x 30	32	35	25	33,7	1	32	35	30	48
42 x 30	40	42	32	42,4	1 1/4	40	42	30	40
48 x 30	-	-	40	48,3	1 1/2	-	48	30	32
54 x 30	50	54	-	54	-	50	54	30	28
60 x 30	-	-	50	60,3	2	63	60	30	24
63 x 30	-	64	-	63,5	-	63	63	30	24
76 x 30	65	76,1	65	76,1	2 1/2	75	76	30	22
89 x 30	80	88,9	80	88,9	3	90	89	30	18
114 x 30	100	114	100	114,3	4	110	114	30	12

NMC reserves the right to update the product line or its technical features to the state-of-the-art technology anytime and without previous announcement. All given information is to the best of our knowledge. If you have any questions concerning technical details please contact the NMC information service. Any partial reproduction or reprint shall require our explicit approval.
07/2026 responsible publisher: NMC sa · Gert - Noël - Strasse · B - 4731 Eynatten · www.nmc - insulation.com