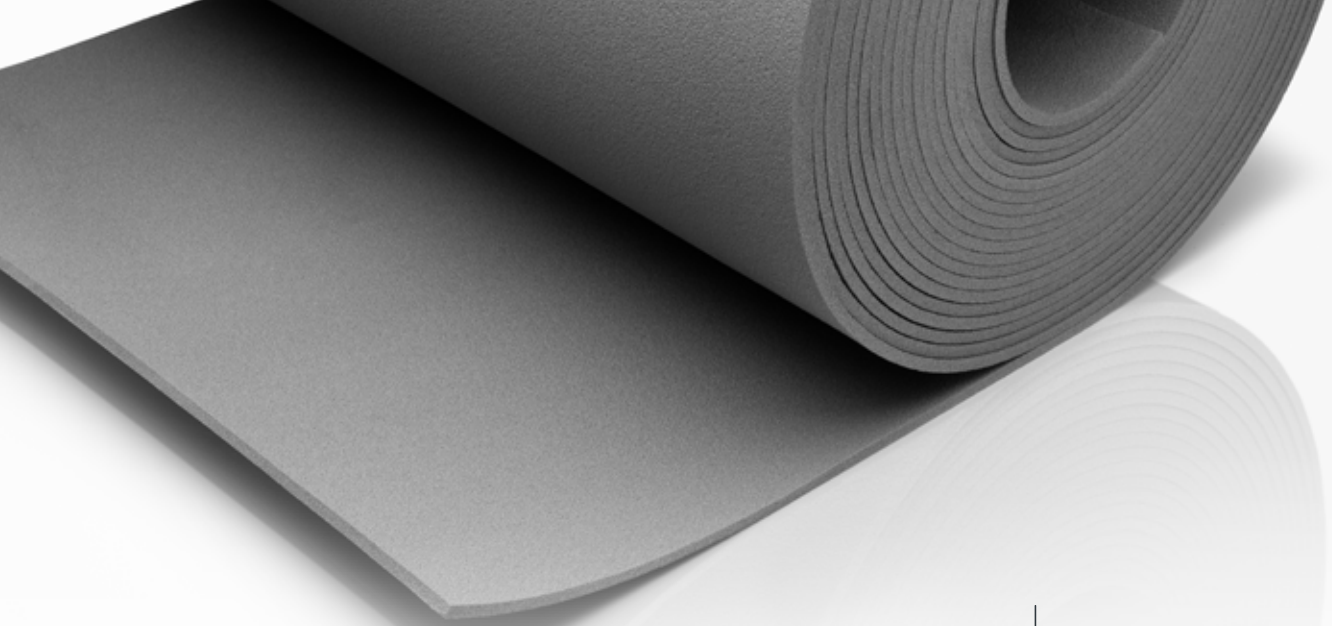


CLIMAFLEX® | roll

MATERIAL	CLIMAFLEX® ROLL is a flexible insulation made of closed-cell, cross-linked polyethylene foam.
THERMAL CONDUCTIVITY (EN 12667)	0,039 W/mK at 0 °C 0,045 W/mK at 40 °C 0,051 W/mK at 90 °C
TEMPERATURE RANGE (EN 14707)	0 °C to +100 °C
FIRE PERFORMANCE (EN 13501-1)	Euroclass E
APPLICATION AREA	Heating and plumbing

ADVANTAGES


- Suitable for cutting and fitting complex geometries such as flanges, large-diameter pipes and ventilation ducts in heating and plumbing applications.
- Contributes to the energy-efficient operation of heating and plumbing systems by reducing heat loss.
- The closed-cell material structure can reduce flow and creaking noises, thereby improving acoustic comfort.

See website for Declaration of performance: www.nmc-insulation.com

Tafarnaubach Industrial Estate · UK-NP22 3AA Tredegar, South Wales
Phone: +44 1495 713266 · Fax: +44 1495 713277
Email: enquiries@nmc-uk.com

PRODUCT RANGE

CLIMAFLEX® | roll



Type	A mm	B mm	Length m	Pkg unit m^2
1000 x 10	1000	10	30	30
1000 x 15	1000	15	25	25
1000 x 20	1000	20	25	25

NMC reserves the right to update the product line or its technical features to the state-of-the-art technology anytime and without previous announcement. All given information is to the best of our knowledge. If you have any questions concerning technical details please contact the NMC information service. Any partial reproduction or reprint shall require our explicit approval.

07/2026 responsible publisher: NMC sa · Gert - Noël - Strasse · B - 4731 Eynatten · www.nmc - insulation.com