


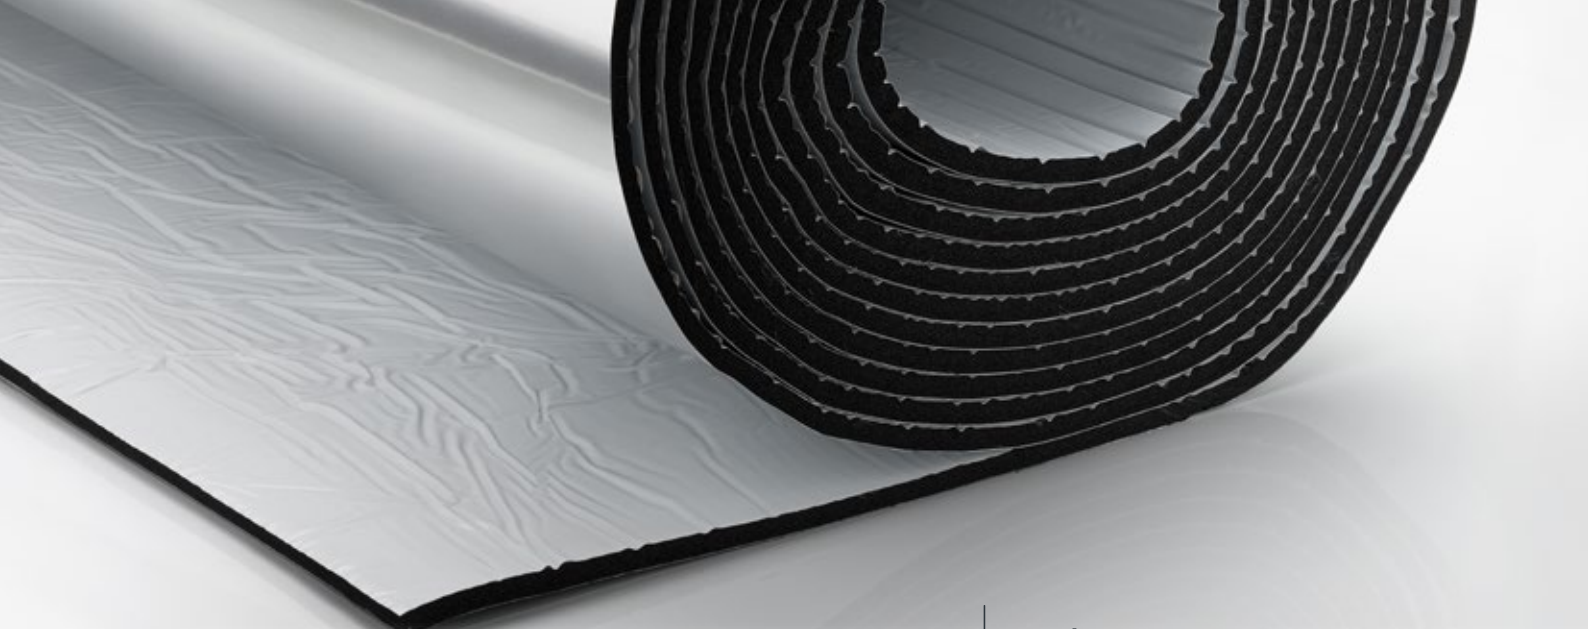

INSUL ROLL

xt
cover silver

MATERIAL	INSUL ROLL xt cover silver is a flexible insulating material made of closed-cell foam based on rubber, with self-adhesive closing system and pre-covered with a synthetic-aluminium laminated foil (rolled insulation).
THERMAL CONDUCTIVITY (EN ISO 8497)	0,034 W/mK at -30 °C 0,036 W/mK at 0 °C 0,039 W/mK at 40 °C 0,044 W/mK at 70 °C
TEMPERATURE RANGE (EN 14707)	-30 °C to +85 °C
TEMPERATURE RESISTANCE FOR JACKETING	-25 °C up to 75 °C
FIRE PERFORMANCE (EN 13501-1)	Ds3d0
WATER VAPOUR DIFFUSION RESISTANCE (EN 13469)	≤ 25 mm: 10.000 μ ≥ 32 mm: 7.000 μ
APPLICATION AREA	Air conditioning Cooling systems

See website for Declaration of performance: www.nmc-insulation.com



NMC sa
Gert-Noël-Strasse · B-4731 Eynatten
Phone: +32 87 85 85 00 · Fax: +32 87 85 83 55
E-Mail: info@nmc.eu
www.nmc-insulation.com




PRODUCT RANGE

INSUL ROLL

xt

cover silver



ADVANTAGES

- High insulation performance due to low thermal conductivity, helping to reduce heat loss.
- Reduces condensation formation and supports protection against moisture-related corrosion.
- Closed-cell material structure with high water vapour diffusion resistance for reliable insulation protection.
- Sound-insulating properties helping to reduce flow and operational noise.
- Protection against external mechanical impacts.
- UV-resistant.
- Thanks to its aesthetic metallic-look surface, suitable for both indoor and outdoor applications and easy to clean.
- Cut-to-size according to requirements.
- Minimal cutting scrap
- Self-adhesive

Type	A mm	B mm	Length m	Pkg unit m²
1000 x 6	1000	6	20	20
1000 x 9	1000	9	15	15
1000 x 13	1000	13	11	11
1000 x 16	1000	16	9	9
1000 x 19	1000	19	8	8
1000 x 25	1000	25	6	6
1000 x 32	1000	32	4	4