

INSUL-TUBE®

support & collar

MATERIAL	INSUL-TUBE® SUPPORT & COLLAR an insulating pipe holder consisting of a PIR shell with black elastomer foam joints, covered with a black PVC tape. Supplied with the matching pipe clips.
LENGTH	50 - 100 mm
PIR CORE DENSITY	80 - 120 kg/m³
THERMAL CONDUCTIVITY (EN ISO 8497)	0,025 W/mK at 0 °C
TEMPERATURE RANGE (EN 14707)	-45 °C to +105 °C
WATER VAPOUR DIFFUSION RESISTANCE (EN 13469)	≥ 10.000 μ
APPLICATION AREA	Heating and plumbing Cooling systems Air conditioning Cold water applications

ADVANTAGES


- High insulation performance due to low thermal conductivity, helping to reduce heat loss.
- Reduces the formation of condensation and supports protection against moisture-related corrosion at pipe fixing points.

See website for Declaration of performance: www.nmc-insulation.com

NMC (UK) LTD.
Tafarnaubach Industrial Estate · UK-NP22 3AA Tredegar, South Wales
Phone: +44 1495 713266 · Fax: +44 1495 713277
Email: enquiries@nmc-uk.com
www.nmc-insulation.com

PRODUCT RANGE

INSUL-TUBE® | support & collar




	Copper CU		Steel FE			Synthetics MSV & PEX			
Type	NW DN	Outer Ø mm	NW DN	Outer Ø mm	Outer Ø inch	Outer Ø mm	A mm	B mm	Pkg unit PCS
10 x 13	8	10	6	10,2	1/8	-	10	13	96
12 x 13	10	12	-	-	-	-	12	13	96
15 x 13	10	15	8	13,5	1/4	-	15	13	80
19 x 13	15	18	10	17,2	3/8	16	19	13	80
22 x 13	20	22	15	21,3	1/2	20	22	13	60
28 x 13	25	28	20	26,9	3/4	25	28	13	60
32 x 13	-	-	-	-	1	32	32	13	44
35 x 13	32	35	25	33,7	1	32	35	13	44
42 x 13	40	42	32	42,4	1 1/4	40	42	13	44
48 x 13	-	-	40	48,3	1 1/2	-	48	13	44
54 x 13	50	54	-	54	-	50	54	13	32
64 x 13	-	64	-	63,5	-	63	64	13	24
70 x 13	-	-	-	-	-	-	70	13	24
76 x 13	65	76,1	65	76,1	2 1/2	-	76	13	24
80 x 13	-	80	-	-	-	-	80	13	20
89 x 13	80	88,9	80	88,9	3	-	89	13	8
10 x 19	8	10	6	10,2	1/8	-	10	19	60
12 x 19	10	12	-	-	-	-	12	19	60
15 x 19	10	15	8	13,5	1/4	-	15	19	60
19 x 19	15	18	10	17,2	3/8	16	19	19	50
22 x 19	20	22	15	21,3	1/2	20	22	19	50
28 x 19	25	28	20	26,9	3/4	25	28	19	40
35 x 19	32	35	25	33,7	1	32	35	19	32
42 x 19	40	42	32	42,4	1 1/4	40	42	19	32
48 x 19	-	-	40	48,3	1 1/2	-	48	19	24

NMC reserves the right to update the product line or its technical features to the state-of-the-art technology anytime and without previous announcement. All given information is to the best of our knowledge. If you have any questions concerning technical details please contact the NMC information service. Any partial reproduction or reprint shall require our explicit approval.

07/2026 responsible publisher: NMC sa · Gert - Noël - Strasse · B - 4731 Eynatten · www.nmc - insulation.com

PRODUCT RANGE

INSUL-TUBE® | support & collar




	Copper CU		Steel FE			Synthetics MSV & PEX			
Type	NW DN	Outer Ø mm	NW DN	Outer Ø mm	Outer Ø inch	Outer Ø mm	A mm	B mm	Pkg unit PCS
54 x 19	50	54	-	54	-	50	54	19	24
64 x 19	-	64	-	63,5	-	63	64	19	24
70 x 19	-	-	-	-	-	-	70	19	20
76 x 19	65	76,1	65	76,1	2 1/2	-	76	19	12
80 x 19	-	80	-	-	-	-	80	19	12
89 x 19	80	88,9	80	88,9	3	-	89	19	12
12 x 25	10	12	-	-	-	-	12	25	60
15 x 25	10	15	8	13,5	1/4	-	15	25	32
19 x 25	15	18	10	17,2	3/8	16	19	25	32
22 x 25	20	22	15	21,3	1/2	20	22	25	32
28 x 25	25	28	20	26,9	3/4	25	28	25	32
35 x 25	32	35	25	33,7	1	32	35	25	24
42 x 25	40	42	32	42,4	1 1/4	40	42	25	24
54 x 25	50	54	-	54	-	50	54	25	24
22 x 32	20	22	15	21,3	1/2	20	22	32	24
28 x 32	25	28	20	26,9	3/4	25	28	32	24
35 x 32	32	35	25	33,7	1	32	35	32	24
42 x 32	40	42	32	42,4	1 1/4	40	42	32	15
54 x 32	50	54	-	54	-	50	54	32	12
60 x 32	-	-	50	60,3	2	-	60	32	12
76 x 32	65	76,1	65	76,1	2 1/2	-	76	32	10

NMC reserves the right to update the product line or its technical features to the state-of-the-art technology anytime and without previous announcement. All given information is to the best of our knowledge. If you have any questions concerning technical details please contact the NMC information service. Any partial reproduction or reprint shall require our explicit approval.

07/2026 responsible publisher: NMC sa · Gert - Noël - Strasse · B - 4731 Eynatten · www.nmc - insulation.com

FITTING INSTRUCTIONS

INSUL-TUBE® | support & collar




1




Ceiling mounting and joining of clip elements.

2

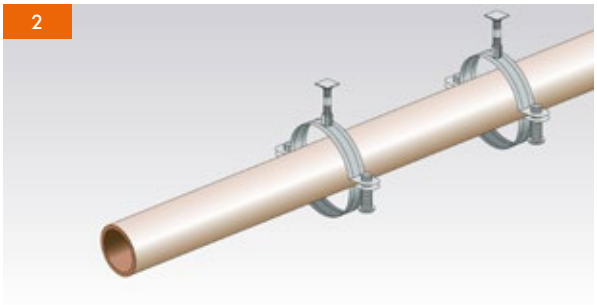


Place pipe in clips in position.

3

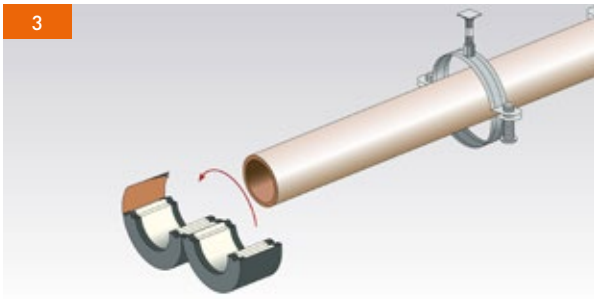


Fix INSUL-TUBE® SUPPORT & COLLAR pipe holder around the pipe.

4

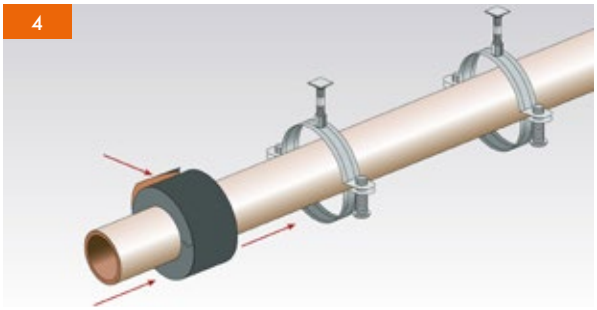


Affix overlapping protective film. Insert INSUL-TUBE® SUPPORT & COLLAR centrally into / under the pipe clips.

5

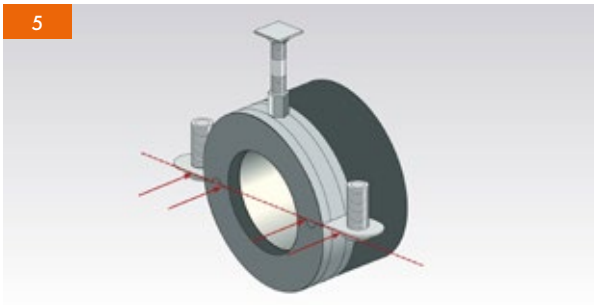


Pipe holder seam lies horizontally at the same height as the clip screws.

6

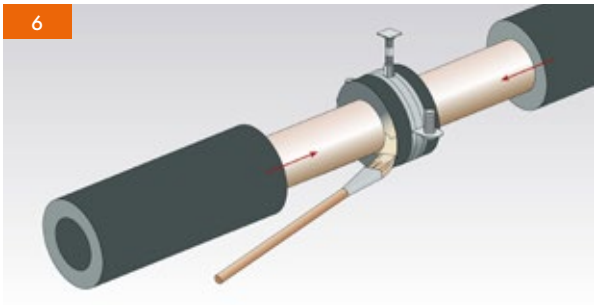

Apply a thin coat of NMC-Fix® adhesive to both sides of the pipe holder and the pipe surfaces, then stick together after evaporation time.

7

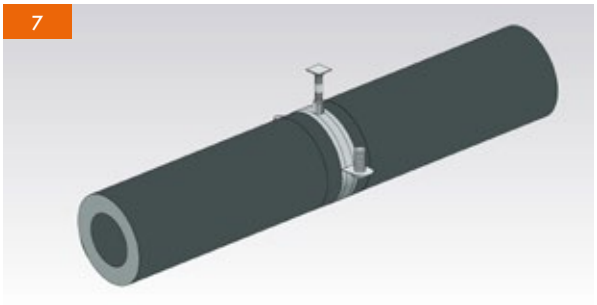

Assembly completion after secure, diffusion-free bonding.

NMC reserves the right to update the product line or its technical features to the state-of-the-art technology anytime and without previous announcement. All given information is to the best of our knowledge. If you have any questions concerning technical details please contact the NMC information service. Any partial reproduction or reprint shall require our explicit approval.
07/2026 responsible publisher: NMC sa · Gert - Noël - Strasse · B - 4731 Eynatten · www.nmc - insulation.com